



Pioneering New Frontiers in Poly Thermal Inkjet Technology!

# S2i Hand Held Thermal Inkjet Printing System

Smart Handheld Printing Platform



## Multilingual Support

Support Chinese, English, Japanese, French, German, Spanish, Portuguese and Russian etc. languages




## Wifi

Support Wifi connection  
Achieve inkjet printer real-time online printing



## Four-wheel Module

Selectable four-wheel adjustable module, the printing distance can be adjusted according to the printing object

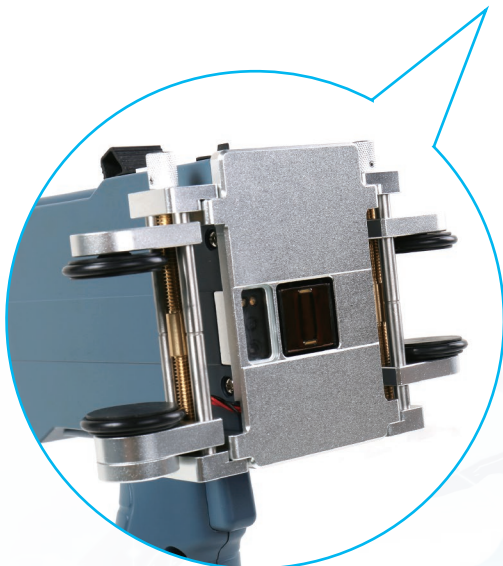

## Features

### Selectable Languages

English, Japanese, French, German, Spanish, Portuguese and Russian

### Multi-line Printing

Support simultaneous printing multiple lines of data

### Printable Heights

1~12.7mm

### Interface

New user interface, using 5inch, 1280\*720 resolution capacitive screen, touch operation interface

### Input Methods

Selectable input methods for different languages

### Data Edition

Flexible data edition, support various data sources, same object can be inserted into different data sources

### Authority Registration

Selectable different registration authorities, can customized registration for special functions

### Database (registration function)

Inkjet printer can connect database via Wifi, real-time print database content

### Throw Distance

Standard 300dpi wheel

Selectable four-wheel adjustable module, the printing distance can be adjusted according to the printing object

### Port

USB2.0 port: Support U-Disk

### Power Supply

AC 90V-240V/50-60HZ (Dedicated power supply charger)

### Product Certifications

CE、FCC

### Printing Objects

Print text, image and barcode etc. variable data

### Counters

Flexible setting for counters, customizable system of counters

### Date and Time

Variety modes of date and time available

### Built-in Encoder

Use electronic encoder, smaller and lighter inkjet printer

### Print Monitoring and Respray

Real-time monitoring content of print data, and real-time respray failed content

### Barcodes

PCA, UPCE, EAN13, EAN8, INT25, CODE39, CODE128, EAN128, PDF417, DATAMATRIX, QR

### User Management

Set different operation authorities according to the needs of users

### Battery

Number: Standard 2pcs rechargeable batteries with large capacity

Capacity: Each battery is comprised of three 2200mAh battery module

Voltage: 11.1V--12.6V

Lifetime: >300 cycle number

Stand-by time: >8H

Continuous printing time: >3H; (Depends on testing)

### Ink Management

Automatically recognize ink types, and identify the optimum printing parameters

Guarantee of using genuine original OEM ink

Automatic detection system for remaining ink volume

### Environment

Working Environment: -10°-- +45°C; 10%-85%RH

Storage Environment: -25°-- +55°C; 10%-90%RH

## Specifications

Dimensions: 160\*220\* 70.5mm/ 6.3\*8.6\*2.7 inch

Weight: 700g (excluding ink cartridge)

**Polytjij**<sup>®</sup>

[www.polytjijusa.com](http://www.polytjijusa.com)

### USA Sales Headquarters

Graphic Solid Inks, Inc.  
6845 Shiloh Rd E, STE D-12  
Alpharetta, GA 30005  
Ph: 678.264.4008

### Northern Sales Office

Graphic Solid Inks, Inc.  
106 Kalkaska Street  
Kalkaska, MI 49646  
Ph: 231.258.5476